

Bridge Clamp ASFA L (9 mm)

W2



ASFA L Bridge Clamps with 9 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix.


The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.


* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Single bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PD3250W2L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PD4060W2L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PD5070W2L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PD6080W2L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PD7090W2L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PD80100W2L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PD90110W2L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PD100120W2L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PD110130W2L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PD120140W2L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PD130150W2L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PD140160W2L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|--------------------------------|--|
| | MATERIAL | W2: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 72 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

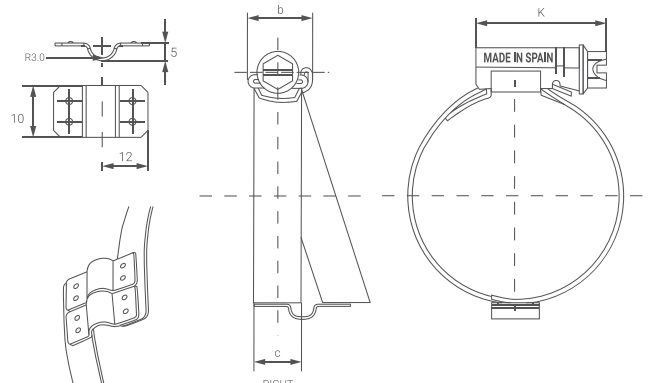

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.





W2

Double bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PD3250W2L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PD4060W2L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PD5070W2L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PD6080W2L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PD7090W2L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PD80100W2L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PD90110W2L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PD100120W2L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PD110130W2L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PD120140W2L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PD130150W2L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PD140160W2L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|--|
| | MATERIAL | W2: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 72 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

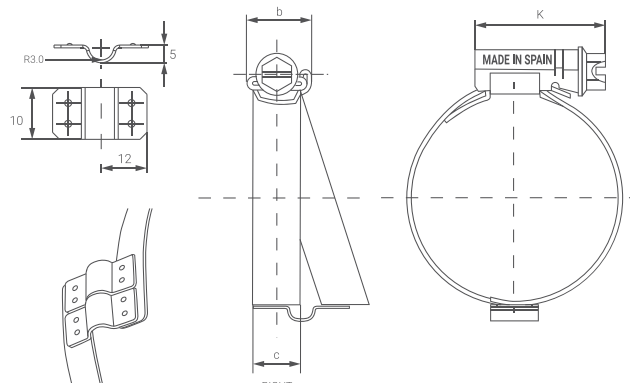

Bridge Clamp ASFA L (9 mm)


These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




Single bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PI3250W2L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PI4060W2L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PI5070W2L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PI6080W2L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PI7090W2L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PI80100W2L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PI90110W2L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PI100120W2L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PI110130W2L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PI120140W2L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PI130150W2L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PI140160W2L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|--|
| | MATERIAL | W2: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 72 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

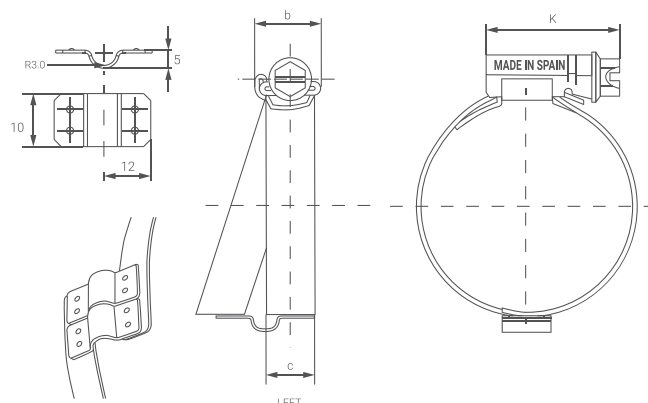

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.





W2

Double bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PI3250W2L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PI4060W2L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PI5070W2L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PI6080W2L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PI7090W2L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PI80100W2L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PI90110W2L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PI100120W2L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PI110130W2L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PI120140W2L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PI130150W2L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PI140160W2L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|--|
| | MATERIAL | W2: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 72 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

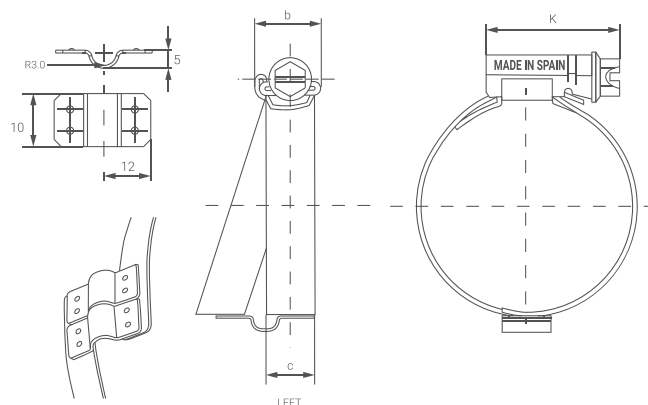

Bridge Clamp ASFA L (9 mm)



ASFA L Bridge Clamps with 9 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix.


The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.


* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Single bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PD3250W3L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PD4060W3L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PD5070W3L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PD6080W3L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PD7090W3L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PD80100W3L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PD90110W3L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PD100120W3L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PD110130W3L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PD120140W3L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PD130150W3L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PD140160W3L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

| TECHNICAL INFORMATION | |
|---|--|
|  | MATERIAL W3: STAINLESS STEEL AISI 430 |
| | FINISH STAINLESS STEEL |
| | CORROSION RESISTANCE 200 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) 540 ±5 |

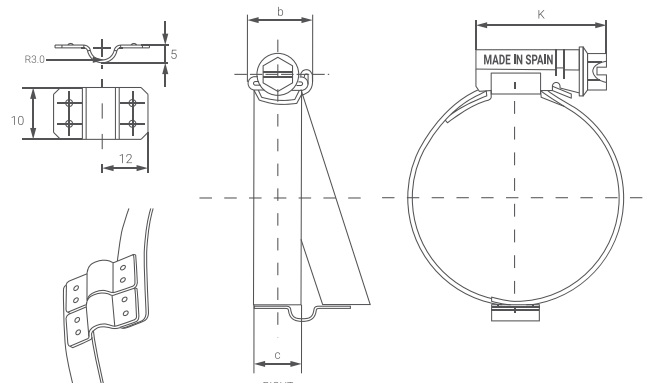

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.





W3

Double bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PD3250W3L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PD4060W3L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PD5070W3L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PD6080W3L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PD7090W3L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PD80100W3L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PD90110W3L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PD100120W3L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PD110130W3L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PD120140W3L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PD130150W3L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PD140160W3L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|---|
| | MATERIAL | W3: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 200 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

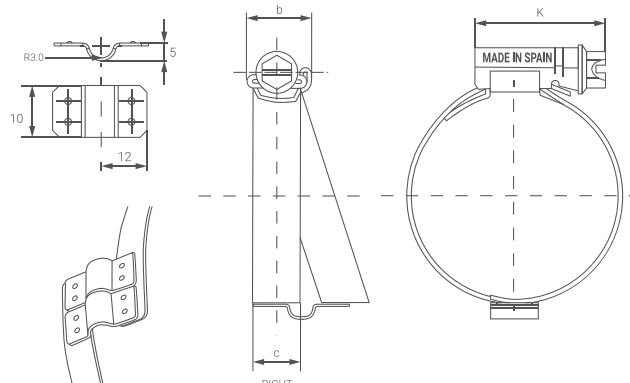

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.





W3

Single bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PI3250W3L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PI4060W3L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PI5070W3L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PI6080W3L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PI7090W3L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PI80100W3L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PI90110W3L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PI100120W3L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PI110130W3L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PI120140W3L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PI130150W3L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PI140160W3L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|--------------------------------|---|
| | MATERIAL | W3: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 200 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

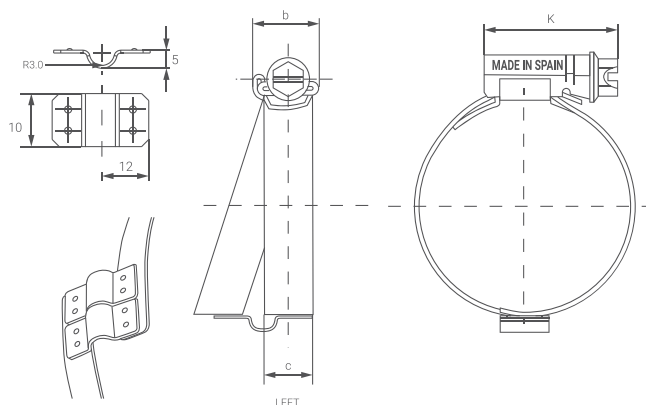

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




W3

Double bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PI3250W3L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PI4060W3L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PI5070W3L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PI6080W3L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PI7090W3L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PI80100W3L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PI90110W3L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PI100120W3L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PI110130W3L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PI120140W3L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PI130150W3L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PI140160W3L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

| | TECHNICAL INFORMATION | |
|--|---------------------------------------|---|
| | MATERIAL | W3: STAINLESS STEEL AISI 430 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 200 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

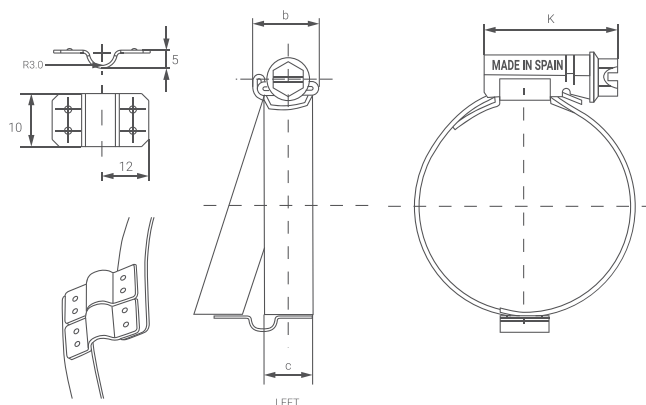

Bridge Clamp ASFA L (9 mm)



ASFA L Bridge Clamps with 9 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix.

The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.


* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Single bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PD3250W4L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PD4060W4L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PD5070W4L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PD6080W4L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PD7090W4L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PD80100W4L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PD90110W4L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PD100120W4L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PD110130W4L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PD120140W4L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PD130150W4L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PD140160W4L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

| | TECHNICAL INFORMATION | |
|--|---------------------------------------|---|
| | MATERIAL | W4: STAINLESS STEEL AISI 304 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 400 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

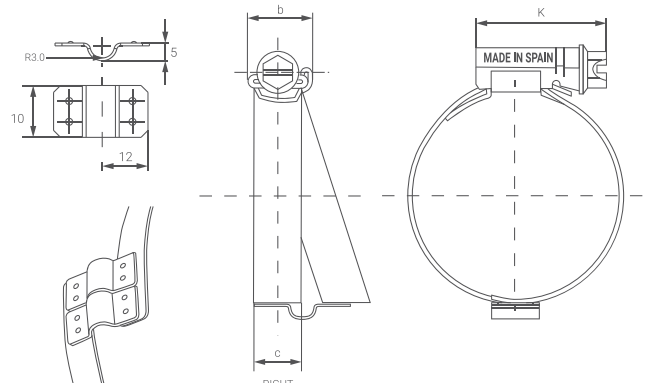

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




Double bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PD3250W4L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PD4060W4L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PD5070W4L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PD6080W4L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PD7090W4L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PD80100W4L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PD90110W4L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PD100120W4L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PD110130W4L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PD120140W4L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PD130150W4L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PD140160W4L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

| | TECHNICAL INFORMATION | |
|--|---------------------------------------|---|
| | MATERIAL | W4: STAINLESS STEEL AISI 304 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 400 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

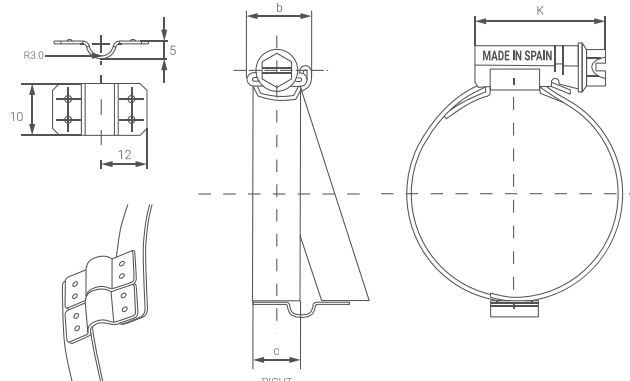

Bridge Clamp ASFA L (9 mm)


These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




Single bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PI3250W4L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PI4060W4L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PI5070W4L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PI6080W4L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PI7090W4L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PI80100W4L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PI90110W4L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PI100120W4L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PI110130W4L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PI120140W4L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PI130150W4L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PI140160W4L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|---|
| | MATERIAL | W4: STAINLESS STEEL AISI 304 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 400 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

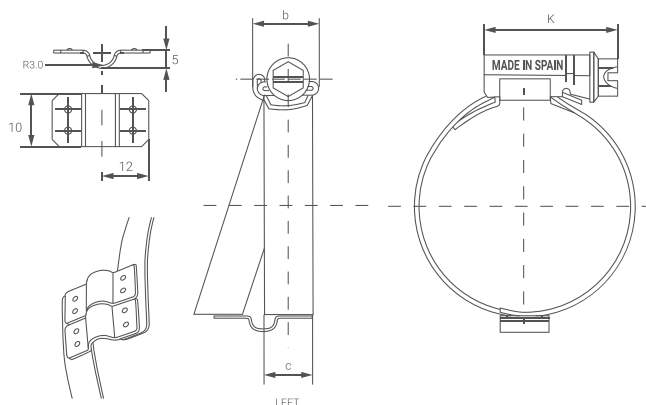

Bridge Clamp ASFA L (9 mm)


These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




Double bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PI3250W4L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PI4060W4L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PI5070W4L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PI6080W4L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PI7090W4L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PI80100W4L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PI90110W4L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PI100120W4L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PI110130W4L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PI120140W4L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PI130150W4L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PI140160W4L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|---|
| | MATERIAL | W4: STAINLESS STEEL AISI 304 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 400 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

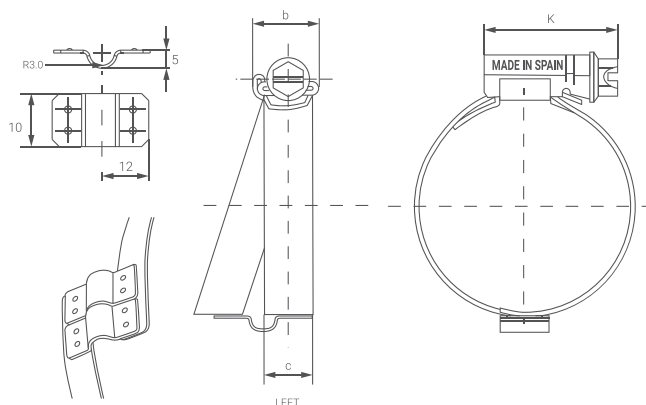

Bridge Clamp ASFA L (9 mm)



W5

ASFA L Bridge Clamps with 9 mm bandwidth and manufactured with one or two bridges are an ideal solution for hoses with an outer helix.


The geometry and design of the bridges ensure a leaktight fit. These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.


* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Single bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PD3250W5L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PD4060W5L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PD5070W5L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PD6080W5L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PD7090W5L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PD80100W5L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PD90110W5L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PD100120W5L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PD110130W5L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PD120140W5L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PD130150W5L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PD140160W5L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|--------------------------------|---|
| | MATERIAL | W5: STAINLESS STEEL AISI 316 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 1.000 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

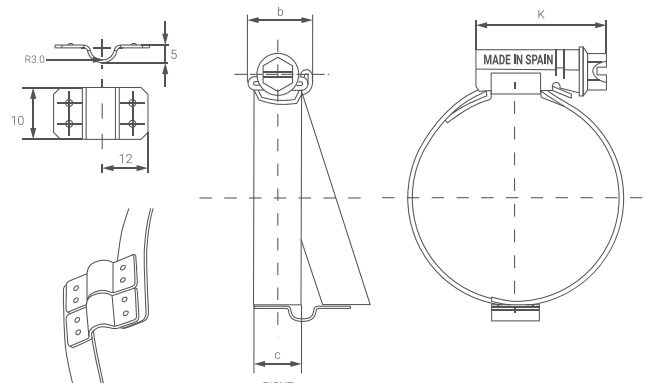

Bridge Clamp ASFA L (9 mm)


These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




Double bridge right

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PD3250W5L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PD4060W5L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PD5070W5L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PD6080W5L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PD7090W5L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PD80100W5L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PD90110W5L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PD100120W5L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PD110130W5L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PD120140W5L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PD130150W5L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PD140160W5L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

|  | TECHNICAL INFORMATION | |
|---|---------------------------------------|---|
| | MATERIAL | W5: STAINLESS STEEL AISI 316 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 1.000 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

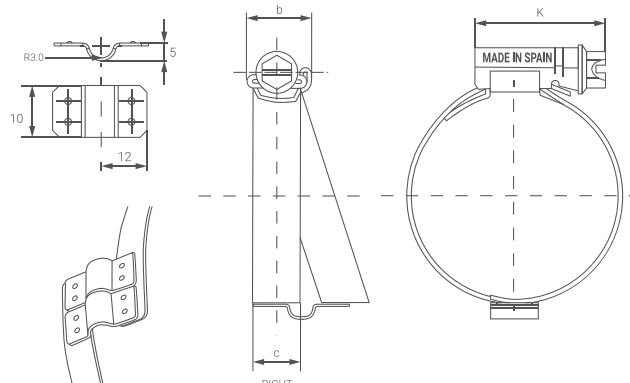

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.




W5

Single bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A1PI3250W5L | 32-46 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A1PI4060W5L | 40-56 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A1PI5070W5L | 50-66 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A1PI6080W5L | 60-76 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A1PI7090W5L | 70-86 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A1PI80100W5L | 80-96 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A1PI90110W5L | 90-106 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A1PI100120W5L | 100-116 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A1PI110130W5L | 110-126 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A1PI120140W5L | 120-136 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A1PI130150W5L | 130-146 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A1PI140160W5L | 140-156 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

| | TECHNICAL INFORMATION | |
|--|---------------------------------------|---|
| | MATERIAL | W5: STAINLESS STEEL AISI 316 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 1.000 hours salt spray test ASTM B-117 |
| | MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 |

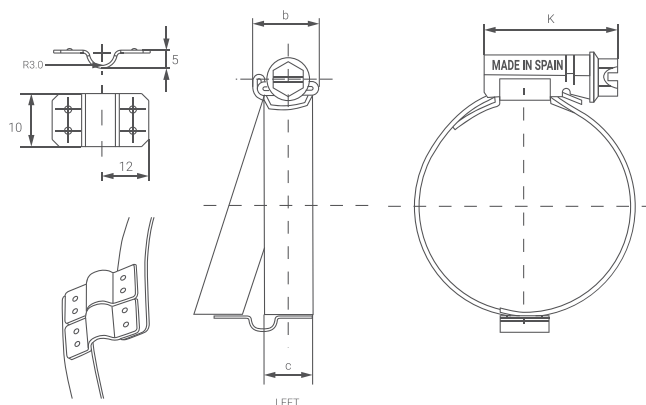

Bridge Clamp ASFA L (9 mm)

These clamps are specially recommended for use on medium-sized and large bore hose mainly used for ventilation or extraction.



Double bridge left

| Size | Part Number | Application Diameter | b Max. | c +0.3-0.1 | K Max. | Max. Pressure (Bar) | Box Quantity (MOQ) |
|---------|---------------|----------------------|--------|------------|--------|---------------------|--------------------|
| 32-50 | A2PI3250W5L | 32-43 | 14 | 9 | 25,6 | 24 | 100 |
| 40-60 | A2PI4060W5L | 40-53 | 14 | 9 | 25,6 | 19 | 100 |
| 50-70 | A2PI5070W5L | 50-63 | 14 | 9 | 29,6 | 17 | 100 |
| 60-80 | A2PI6080W5L | 60-73 | 14 | 9 | 29,6 | 15 | 100 |
| 70-90 | A2PI7090W5L | 70-83 | 14 | 9 | 29,6 | 13 | 50 |
| 80-100 | A2PI80100W5L | 80-93 | 14 | 9 | 29,6 | 11 | 50 |
| 90-110 | A2PI90110W5L | 90-103 | 14 | 9 | 29,6 | 10 | 25 |
| 100-120 | A2PI100120W5L | 100-113 | 14 | 9 | 29,6 | 9 | 25 |
| 110-130 | A2PI110130W5L | 110-123 | 14 | 9 | 29,6 | 8 | 25 |
| 120-140 | A2PI120140W5L | 120-133 | 14 | 9 | 29,6 | 7 | 25 |
| 130-150 | A2PI130150W5L | 130-143 | 14 | 9 | 29,6 | 6 | 25 |
| 140-160 | A2PI140160W5L | 140-153 | 14 | 9 | 29,6 | 5 | 25 |

* It is recommended to apply 75% of the maximum values contained in the table.

| | TECHNICAL INFORMATION | |
|---------------------------------------|-----------------------------|---|
| | MATERIAL | W5: STAINLESS STEEL AISI 316 |
| | FINISH | STAINLESS STEEL |
| | CORROSION RESISTANCE | 1.000 hours salt spray test ASTM B-117 |
| MAXIMUM TIGHTENING SPEED (RPM) | 540 ±5 | |

