



ACCU-LINK®

HAJTASTECHNIKA

powered by SIS



MEGADYNE

ACCU-LINK®

Adjustable Link V-Belt

ACCU-LINK® is Megadyne's link belt, created and developed as an alternative to classical rubber V-belts. Megadyne's ACCU-LINK® combines superior strength and durability with quick and easy assembly and installation. The original concept is to give a fast replacement to classical V-belts in case of a break. Today, ACCU-LINK® is used in a very wide range of applications as original equipment.

ACCU-LINK® is a link belt: this means it is made of several links assembled together. Thanks to this, belts can have any length just by modifying the number of links.

Links are made with a polyurethane material, reinforced by a multilayer woven polyester fabric. State-of-the-Art manufacturing produces a high-quality link design which yields superior performance. ACCU-LINK® is precision ground for a smooth side edge and section, which leads to a smooth, silent, low vibrating belt.


MAIN FEATURES AND ADVANTAGES

- EASY TO ASSEMBLE**
 ACCU-LINK® can be assembled without tools and in a matter of seconds.
- EASY TO INSTALL**
 ACCU-LINK® can be adapted to any length; in case of difficult layout or when taking the drive apart would take too long. ACCU-LINK® can be installed open and closed afterwards, in a very easy and fast way.
- SMALL INVENTORY**
 With one roll of ACCU-LINK® it is possible to get any length of classical V-belts; with one roll per section, inventories will be much smaller, easier and less expensive to manage.
- HIGH POWER RATE**
 ACCU-LINK® has power ratings similar to classical V-belts.
- HIGH RESISTANCE TO ENVIRONMENT**
 Thanks to its state-of-the-art materials, ACCU-LINK® can withstand salt, chemicals, oils and grease. This increases the life time compared to standard rubber V-belts.
- HIGH TEMPERATURE RESISTANCE**
 ACCU-LINK® can operate in a wide range of temperatures:
 -25 °C / +80 °C (-13 °F / 176 °F)
- HIGH RESISTANCE TO HARSH ENVIRONMENTS**
 ACCU-LINK® is suited for harsh environments where it can outlast standard rubber V-belts.
- QUIET AND SMOOTH RUNNING**
 Due to the independent link design, ACCU-LINK® runs quieter and smoother than a classical V-belt.

APPLICATIONS

ACCU-LINK® belts can be used in a wide range of applications. The following table lists some of the main applications where ACCU-LINK® Adjustable Link V-Belts are widely used with the advantages compared to classical rubber V-Belts.

APPLICATIONS	MAIN ADVANTAGES
Marine industry	Higher resistance to salty and greasy environments Reduced inventory
Air handling	Easier and quicker to install
Metal and wood working machines	Reduced noise, reduced vibration
Poultry industry	Enhanced resistance to harsh environments
Agriculture	Enhanced resistance to typical agri-environments
Rolling conveyor	Easier and quicker to install Better performing in case of pulley misalignment
Glass industry	Non staining
Tiles and marble conveyor	Easier and quicker to install Enhanced resistance to harsh environments

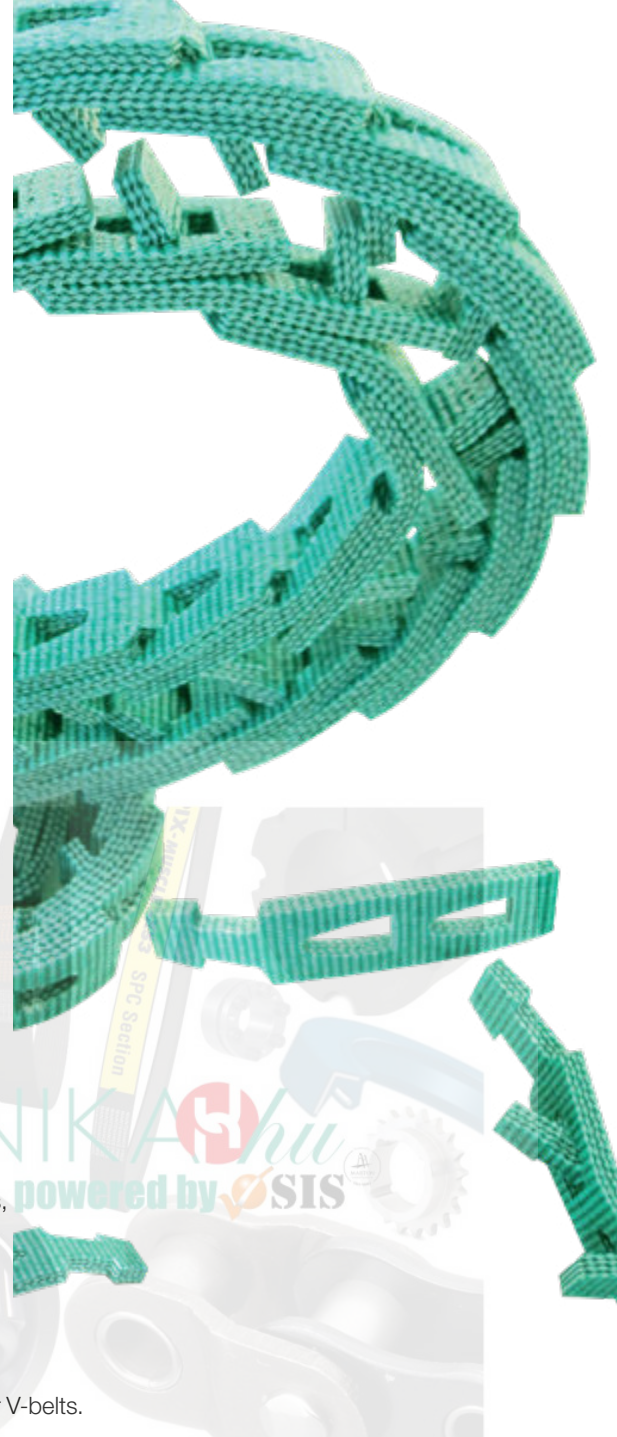

RANGE

ACCU-LINK® belts are available in Z/3L, A/4L, B/5L and C sections. ACCU-LINK® can work on standard pulleys for V-belts. Megadyne can supply open end ACCU-LINK® in carton boxes or endless belts in light carton sleeves.

	Z/3L	A/4L	B/5L	C
Belt weight g/m (+/-1,5)	43,0	76,5	117,5	178,5
Min pulley diameter (mm)	45	80	140	225
Service temperature range	-25 °C / +80 °C (-13 °F / 176 °F)			
Standard roll lengths (ft)	25-100	25-100	25-100	25-50
Standard sleeve lengths (ft)	5	5-6	6	5

Download the e-book with
Technical Calculation:



INSTRUCTIONS

MEASURING



1. Pull the belt tight around the sheaves to check the needed length, overlapping the last two tabs with two holes in matching.

2. Count the number of links and remove one link every 24 for Z/3L, A/4L and B/5L sections, and one link every 20 for C section to get the proper installation tension.

3. For multiple belt drives, be ensure that each belt has the same number of links.

ASSEMBLING



1. Holding the belt with the tabs upwards, let the tab of one belt's end get through two links at once. (three if C section)



2. Flexing the belt as much as needed, twist and insert the second tab through the end link.



3. Ensure that tab will stay transversally to the belt's running direction; reverse the belt upside down to let it running on the tab side.

DISASSEMBLING



1. Put the belt with the tabs upwards and bend it as much as possible.



2. Twist one tab 90° to make it parallel to the belt; in this way you can pull the end of the link over the tab.



3. Rotating the belt by 90° you can now easily pull one belt's end away from the other one.

NOTE: Unlike conventional V-Belts, ACCU-LINK® can be rolled on to pulleys - no cord to break

INSTALLATION

1. Be sure that the belt has the tabs on the inner side: the belt has to run with the tabs oppositely facing the running direction
2. Fit the belt in the nearest groove of the smallest sheave and then roll the belt onto the larger sheave; for multiple belts drive, repeat the operation on all the grooves
3. Always make sure that belts look pretty tight and tabs are still in the correct position.

If it is easy to move the engine, you might install the belt in the following way:

1. Set the engine in mid position of its adjustment range and mark this position clearly
2. Check the belt's length as previously shown
3. Move the engine forward to reduce the center distance
4. Install the belt as in "INSTALLATION" paragraph
5. Pull the engine back to the previously marked position.

RETENSIONING

As in any V-Belt drive, ACCU-LINK® belts require to check for tension after 24 h of full load operating time. If the belt is not tight enough, restore the tension by removing some link. Anyway, check the belt's tension periodically and restore tension.

AUSTRALIA**Victoria**

Phone +61 (03) 9763 6701
 au-ptsales@ammega.com

BRASIL**Sorocaba**

Phone +55 15 2101 7700
 Info.br@megadynegroup.com

CANADA**Edmonton**

Phone +1 780 461 4400
 Info.ca@megadynegroup.com

Montreal

Phone +1 514 695 1313
 Info.ca@megadynegroup.com

Toronto

Phone +1 905 602 4400
 Info.ca@megadynegroup.com

CHINA**Foshan**

Phone +86 757 8381 5530
 info.cn@megadynegroup.com

Ningbo*

Phone +86 574 8650 5008
 info.cn@megadynegroup.com

Phone +86 574 8833 4378
 sales@challengept.com

Qingdao*

Phone +86 532 8658 0951
 info.cn@megadynegroup.com

Shanghai

Phone +86 21 5447 1473
 info.cn@megadynegroup.com

COLOMBIA**Bogotá**

Phone +57 1 390 4325
 Info.co@megadynegroup.com

Cartagena

Phone +57 5 693 2591
 Info.co@megadynegroup.com

Mosquera – Cundinamarca

Phone +57 1 893 9890
 info.co@megadynegroup.com

CZECH REPUBLIC**Prague**

Phone +420 603 461 892
 Info.cz@megadynegroup.com

FRANCE**Paris**

Phone +33 1 6079 8200
 info.fr@megadynegroup.com

GERMANY**Borchen**

Phone +49 5251 8735 0
 info.de@megadynegroup.com

HUNGARY**Budapest**

Phone +36 23 428 628
 info.hu@megadynegroup.com

INDIA**Chennai***

Phone +91 98841 81175
 info.in@megadynegroup.com

IRELAND**Dublin**

Phone +353 1 456 6311
 ireland@challengept.com

ISRAEL**Caesarea**

Phone +972 4 637 1485
 info.il@megadynegroup.com

ITALY**Turin***

Phone +39 011 926 8052
 info@megadynegroup.com

Pescara*

Phone +39 085 9700547
 info.it@megadynegroup.com

Venice

Phone +39 041 929 367
 info.it@megadynegroup.com

JAPAN**Nagoya**

Phone +81 52 433 7400
 info.jp@megadynegroup.com

MEXICO**Mexico C.P.**

Phone +52 55 5587 3680
 info.mx@megadynegroup.com

PERU**Lima**

Phone +51 1 713 0069
 info.pe@megadynegroup.com

POLAND**Bielsko Biala**

Phone +48 32 447 7179
 info.pl@megadynegroup.com

Bydgoszcz*

info.pl@megadynegroup.com

SINGAPORE**Singapore**

Phone +65 62739767
 Info.sg@megadynegroup.com

SOUTH AFRICA**Johannesburg**

Phone +27 (0) 12 661 1652
 info.za@megadynegroup.com

Phone +27 (0) 11 3976115
 sasales@challengept.com

Cape Town

Phone +27 (0)21 9820772
 info.za@megadynegroup.com

SOUTH KOREA**Gyeonggi-do**

Phone +82 314483613-7
 Info.kr@megadynegroup.com

SPAIN**Vilanova***

Phone +34 93 811 5450
 info.es@megadynegroup.com

SWEDEN**Kristianstad**

Phone +46 10 1309600
 info.se@megadynegroup.com

THAILAND**Bangkok**

Phone +66 2 902260413
 info.th@megadynegroup.com

TURKEY**Izmir**

Phone +90 232 877 07 00
 info.tr@megadynegroup.com

U.K.**Birmingham**

Phone +44 1384 215 021
 info.uk@megadynegroup.com

Wolverhampton

Phone +44 (0) 1902 866116
 uksales@challengept.com

U.S.A**California**

Phone +1 323 265 8061
 info.us@megadynegroup.com

Florida

Phone +1 813 241 4111
 info.us@megadynegroup.com

Georgia*

info.us@megadynegroup.com

Illinois

Phone +1 630 752 0600
 info.us@megadynegroup.com

New Jersey Americas HQ

Phone +1 973 227 4904
 info.us@megadynegroup.com

North Carolina*

info.us@megadynegroup.com

Oregon

Phone +1 503 231 7224
 info.us@megadynegroup.com

Texas

Phone +1 972 438 6992
 info.us@megadynegroup.com

*** Manufacturing locations****GENERAL CONTACT INFORMATION****MEGADYNE**

Via S. Lucia, 114
 10075 Mathi (Torino)

Phone +39 011 926 8052
 info@megadynegroup.com

ammega.com