


3

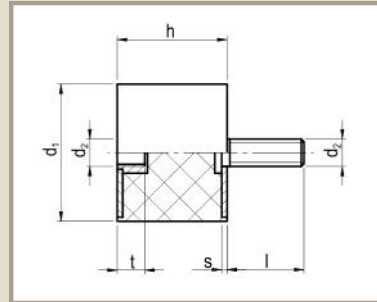

- Galvanized
- Stainless
- UNC
- 40 - +80 °C
- RoHS

1

2

4

5

d <sub>1</sub>	h										d <sub>2</sub>	l	t	s <sub>min</sub>
6	7	8	10	13	-	-	-	-	-	-	M3	6	3	0,8
8	6	8	10	13	15	-	-	-	-	-	M3	6	3	1
10	8	10	12	15	18	20	-	-	-	-	M4	10	4	1,2
15	8	10	12	15	20	25	-	-	-	-	M4	10	4	1,4
18	13	15	-	-	-	-	-	-	-	-	M6	18	6	2
20	10	13	15	20	25	30	-	-	-	-	M6	18	6	2
25	10	15	20	25	30	40	-	-	-	-	M6	18	6	2
30	15	20	25	30	35	40	-	-	-	-	M8	20	8	2
40	15	20	25	30	35	40	45	50	-	-	M8	23	8	2
50	20	25	30	35	40	45	50	60	-	-	M10	28	10	2
60	20	25	30	35	40	45	50	60	-	-	M10	28	10	2
70	25	30	35	40	45	50	55	60	70	-	M10	27	10	3
75	25	30	35	40	45	50	55	60	70	-	M12	37	12	3
80	30	40	50	60	80	-	-	-	-	-	M12	37	12	3
100	25	30	35	40	45	50	55	60	75	100	M16	41	16	3
125	40	55	60	70	75	100	125	-	-	-	M16	41	16	3
150	45	50	55	60	75	100	120	150	-	-	M16	41	16	4
164	75	-	-	-	-	-	-	-	-	-	M16	41	16	4
200	100	-	-	-	-	-	-	-	-	-	M20	40	20	5

### Appearance

- **Elastomer (default natural rubber, NK)**
  - Operation temperature -40 - +80 °C
  - Should not be used at oil, alkaline, acid
  - You can find other opportunities at the Elastomer

6

- **Hardness (default 55 +/-5 Shore A)**

- 43 (soft)
- 55 (medium)
- 72 (hard)

7

- **Metal insert**

- ST37 (galvanized, DIN EN 12329 – Fe//Zn12//A)
- A2 (stainless, AISI 304)
- A4 (stainless, AISI 316)

8

### Use

Perfect for absorbing vibration generated by pumps, fans, washing machines, electric engines, control cabinets and other industrial and agricultural equipments.

Advantages: easy to assemble, high flexibility, economy, longevity.

### Cylindrical vibration dampers

1 2 3 4 5 6 7 8  
**40/30-2 M8x23 NK 55 +/-5 SH A, ST37**

- 1 Diameter (d<sub>1</sub>)
- 2 Height (h)
- 3 Type
- 4 Thread size (d<sub>2</sub>)
- 5 Thread length (l)
- 6 Elastomer
- 7 Hardness
- 8 Metal quality